

Aged Limestone

Polymer Modified Interior and Exterior Wall Finish



Old World Charm. New World Convenience.

LaHabra

The Perfect Finish Starts with LaHabra.

As one of today's leading suppliers of stucco and stucco-related products,

LaHabra is committed to making

home enhancement more practical

with innovative technologies and

products. For more information about

Aged Limestone and other LaHabra

high-quality and finishes, visit

www.lahabrastucco.com or contact

your local LaHabra Distributor today.

Old World Finishes. Real World Advantages.

A unique, polymer-modified, cement-based coating, LaHabra's Aged Limestone makes it easy to achieve a durable, dramatic finish for interior and exterior walls. Duplicating the look and feel of real stone and European cement plasters, it offers the ultimate combination of design flexibility, ease of application and outstanding product performance.




The warmth and beauty of an Old World plaster is easily captured by an Aged Limestone finish.

Unleash Your Imagination.

LaHabra Aged Limestone is a premixed blend of select silica, quartz and other minerals used to create highly dimensional, textured wall coatings with unlimited possibilities for custom applications.

- A limestone finish with textures ranging from ultra-smooth to coarse, unfinished stone can also include an old patina acid wash over the finish.
- An infinite variety of textures and patterns can be created with stencils, stamps, sprayers, brushes, textured rollers and knock-down techniques.
- An infinite variety of colors and special effects can be achieved using metallic tints, iron oxides, stains and glazes.

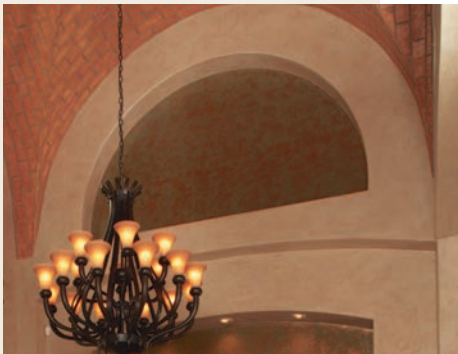

Aged Limestone is the perfect complement for a sophisticated décor.

Texture, color and patterns can be combined to create an infinite variety of effects like these.

Creating Style Has Never Been Simpler.

LaHabra Aged Limestone is easily applied over a variety of smooth substrates to create a cost-effective decorative finish that can satisfy even the most demanding design requirements.

- Product is prepared onsite by mixing Aged Limestone with Admix100 and water in the amounts required.
- Application is by trowel or sprayer over primed drywall, flat concrete, smooth stucco or masonry surfaces.
- Curing creates a long-lasting, low-maintenance, hard durable finish.
- Stored in sealed, 50-lb. bags, LaHabra Aged Limestone lasts up to 6 months.
- Finish can be kept fresh and clean with regular soap and warm water rinses.



Cut into tile




Floated



Textured roller, floated, cut into brick pattern



Textured roller, floated



Floated



Textured roller



Exterior applications of Aged Limestone clearly demonstrate its dramatic effect.



LaHabra Select Finishes are high-quality products that provide a truly unique

appearance for interior and exterior applications. Because the effects they achieve are dependent on using specialized techniques, applicators are required to attend a product education seminar before installation.

LaHabra Aged Limestone Finish

Description

Aged Limestone is a polymer modified finish specifically designed for interior and exterior walls. It is a blend of select silica, quartz and other minerals that produce a hard durable finish. This versatile product is easy to use. It can be tinted with iron oxide pigments or stained with different color shades to match and compliment an existing wall finish. The product offers an infinite number of patterns and textures ranging from ultra smooth to coarse unfinished stone. You can use stencils, sprays, brushes or rollers to create the texture you want, giving you endless possibilities to satisfy the most demanding taste.

Uses

Use Aged Limestone to create a limestone finish on walls or to create the acid wash look of old world patina. Aged Limestone can be applied over flat concrete, stucco or masonry surfaces. Surfaces must be smooth and flat or skimmed out with a leveling coat to create a smooth surface.

Advantages

- Durable polymer modified wall finish.
- A finish that is easy to use.
- Versatility beyond compare.

Packaging

50 LB. (22.7 kg) Bags

Coverage

40-50 sq. ft. per bag

Colors and Textures

Aged Limestone has infinite texturing and coloring possibilities.

Surface Preparation

Surfaces must be structurally sound, clean, dry and free from grease, oil, dirt, curing compounds, sealer adhesives, or any contaminant that would prevent a good bond. Sprinkle water on various areas of the substrate; if water penetrates the substrate, it means a good bond can be achieved. Once contaminants are removed, apply a Primer as a bonding agent. Interior drywall should be finished to a level 3 finish.

Mixing

- Mix 1 quart of LaHabra Admix100 with 3 quarts of water.
- Add the 50-lb. bag of Aged Limestone gradually to the water/admix mixture and mix slowly until a uniform, workable consistency is achieved.
- Let stand for 5 minutes and remix. If the mixture needs more admix (Admix 100 and water), you can add more until you reach a working consistency.
- Working time is 45-60 minutes depending on temperature and relative humidity.
- Once mixed, the product should be applied immediately. Aged Limestone will form a "skin" rapidly, particularly in warm weather.
- The product should not be used once it skins as the strength and performance will have deteriorated.



Corporate Office

ParexLahabra, Inc.
4125 E. La Palma Ave., Suite 250
Anaheim, CA 92807
Telephone: 714-778-2266
Toll Free: 877-LHSTUCCO
Fax: 714-774-2079

Plants

Riverside, CA
French Camp, CA
Albuquerque, NM
Colorado Springs, CO
San Antonio, TX
Redan, GA
Wilkes Barre, PA

Warehouses

Anaheim, CA
North Hollywood, CA

Application

LaHabra requires that all applicators attend an educational seminar on LaHabra Select Finishes. LaHabra recommends that the project owner or designer approve a job site mock-up of the application of this product. The mock-up should demonstrate the products' appearance under the conditions given by the project specification(s).

1. Apply Aged Limestone using either trowel or spray gun.
2. Apply the material 1/16" to 1/4" evenly over the substrate with a stainless steel trowel. If you want to achieve a smooth texture, there is no need to use any texturing apparatus.
3. After 20-30 minutes, use a plastic float trowel to make surface smooth. Textured surface can be achieved by using spray and knock down, textured roller, stencils, and stamps.
4. Do not overwork surfaces, as the finish will tend to "tear" as it skins.
5. Color can be applied after 24 hours. You can color with LaHabra Acrylic Stain or Colored Sand.
6. For exterior finishes, a sealant is recommended for color maintenance.

Clean Up

Clean tools frequently using fresh water. Aged Limestone build-ups are very difficult to remove.

Maintenance

LaHabra Aged Limestone can be cleaned with a soap and water solution followed by a warm water rinse. Do not use harsh or abrasive cleaners.

Storage and Handling

Transport and store Aged Limestone and Admix100 in closed, undamaged containers. Protect from freezing. Avoid eye and skin contact. In case of contact, flush with clean water and seek medical attention if irritation persists.

Shelf Life

If the product remains in an unopened, undamaged, original sealed bag that is properly transported and stored, Aged Limestone has a shelf life of up to 6 months.

Cautions and Limitations

- Use only when surface and air temperatures are above 40°F (4°C) during application and drying time. Do not allow to freeze until completely dry.
- Aged Limestone is not recommended for use:
 - For applications that require a coating more than 3/8" thick.
 - For vertical substrates with large imperfections, unless imperfections are an element of the design.
- Always wear proper safety equipment, including particle mask, eye protection and gloves when mixing and/or applying this product.

CONTAINS FREE SILICA. EXPOSURE TO DUST MAY CAUSE EYE, SKIN OR LUNG INJURY. PROLONGED EXPOSURE MAY CAUSE DELAYED LUNG DISEASE (SILICOSIS). REFER TO MATERIAL SAFETY DATA SHEET FOR FURTHER INFORMATION.



Email: info@lahabrastucco.com
lahabrastucco.com